


TENNESSEE VALLEY AUTHORITY
RACCOON MOUNTAIN MAIN ACCESS
TUNNEL REMEDIATION
CHATTANOOGA, TENNESSEE

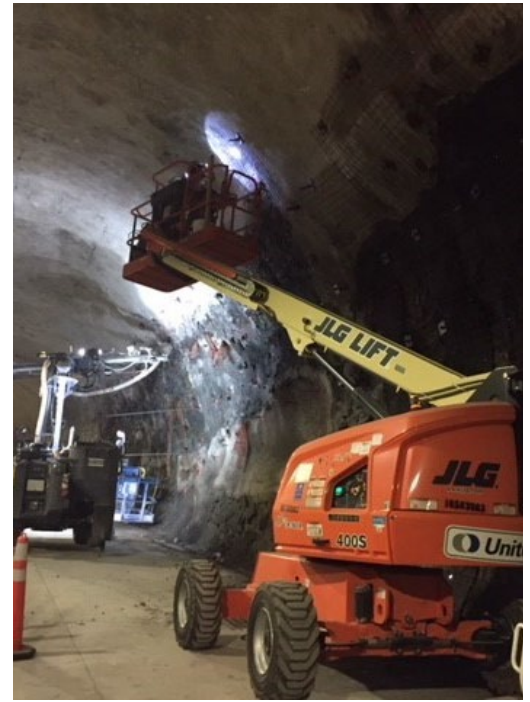

Project Description

This project consisted of remediation of the main access tunnel for the TVA Raccoon Mtn. Pump Storage Station. Approximately 3300 sf of the tunnel walls were scaled, rock bolts were installed, wire mesh reinforcement was installed, and pan drains were placed in water seepage areas. Finally, a 4 to 6 inch coating of shotcrete was applied.

At a Glance

Contract Amount:
\$937,330

Notice to Proceed:
August 2018

Completion Date:
September 2018

Owner Contact Info:
Tennessee Valley Authority

Engineer Contact Info:
MESA Associates, Inc.